

# ***DUROSTONE* TERRAZZO**

## Decorative surface hardener premix


DUROSTONE Terrazzo is a pigmented, colored by special additives, ready to use dry shake hardener for colored aesthetic floor construction.

DUROSTONE Terrazzo is factory premixed, graded, high hardness grind, which contains colored aggregates and cement binders. DUROSTONE Terrazzo should be applied as a wet mortar on a fresh surface. After finishing and polishing the surface, the colored irregularly shaped particles of the material will appear.

- **Salons, showrooms**
- **Restaurants**
- **Public institutions**
- **Industrial facilities of high aesthetic requirements**

### **PRIMARY FEATURES**

- **Wide range of colors, a variety of unique look**
- **Aesthetic, shiny surface**
- **Dust-proof, easy to clean**
- **Durable, wear resistant**

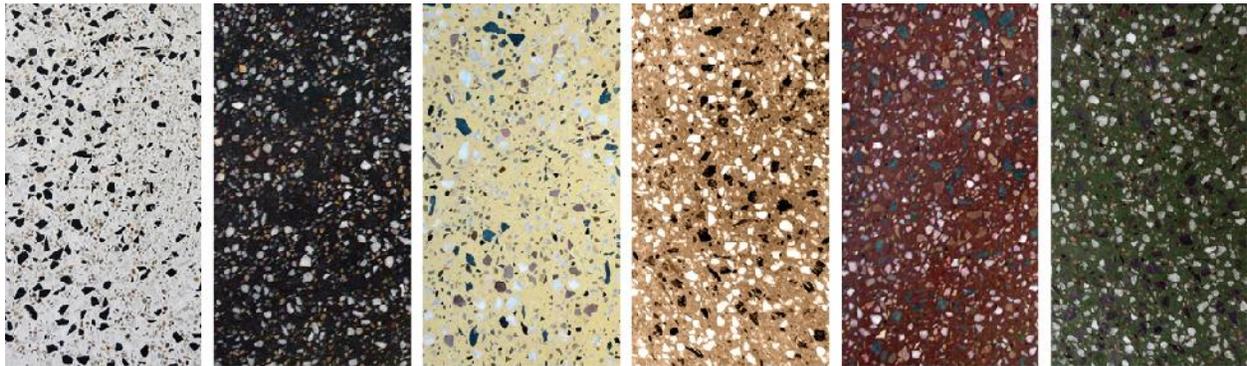

DUROSTONE Terrazzo is a special developed product to meet clients' decorative requirement. Various harmonious color combinations of shiny and sparkling surfaces can be made of it. In addition to six standard versions, further color combinations can also be available. DUROSTONE Terrazzo is a special developed product to meet clients' decorative requirement. Various harmonious color combinations of shiny and sparkling surfaces can be made of it. In addition to six standard versions, further color combinations can also be available.



## PRODUCT DESCRIPTION

DUROSTONE Terrazzo is a special developed product to meet clients' decorative requirement. Various harmonious color combination of shiny and sparkling surfaces can be made of it. In addition to six standard versions, further color combinations can also be available.

## SPECIFICATIONS

compressive strength: 70 N/mm<sup>2</sup> at 28 days  
flexural strength: 7 Nmm<sup>2</sup> at 28 days  
abrasion resistance: A6 (MSZ EN 13892-3)  
granulometry: 0-5 mm  
density: 2400 kg/m<sup>3</sup>  
material consumption: 12-30 kg/m<sup>2</sup>  
layer thickness: between 6-15 mm

Standard colors: white, anthracite, ivory, tobacco, red, green

Colored granules (marble, basalt, granite): white, black, green, red, yellow

## DIRECTIONS FOR USE

The DUROSTONE Terrazzo must be applied to walk-on, fresh concrete. Before applying the concrete finishing machine, the surface should be roughened with brooming for the best possible grip. Before any application on old concrete surface ask for more detailed information!

## Polishing

Grinding of DUROSTONE Terrazzo surface can be started after 7 days from application with an appropriate machine (p.ex. HTC, Blastrac). Surface should be treated with Liqui-Hard hardener. After this, the floor should be polished.

It can arrive, that after polishing air bubbles in DUROSTONE Terrazzo will appear as tiny holes on the surface. These holes can be filled with Durostone Filler material. This fine dry dry-mortar (of the same colour) should be mixed with water and should be moved on the surface to eliminate the holes.

As an extra protection, it is recommended to apply a lacquer coating to give more shine and water-tightness to the surface.

The above description contains only general directions of use, does not cover every detail. Application can only be made by experienced, professional contractor.

## PACKAGING

In bags of 25 kg.

## STORAGE

The shelf life of the product is 12 months, when stored in dry, non-frost and cool conditions.

## Warning!

This product description is based on laboratory tests and on the results of our own experiences. Material

Making DUROSTONE Terrazzo can be done with a concrete mixer. For larger implementations a mixer pump (for ex. Estrich Boy) is recommended. One bag of DUROSTONE Terrazzo should be mixed with 4-5 liters of water. The mortar should be mixed until a completely smooth, dense, homogeneous mass is obtained. Avoid water over-feeding, because it may cause cracks in the surface or segregation, that can degrade the quality of the floor.

The DUROSTONE Terrazzo of right consistency should be uniformly applied to the concrete. In case of a layer thicker than 5-6 mm, a guiding strip should be used to ensure a uniform thickness, and to achieve a good planimetry.

After the curing process starts, the surface should be compacted and finished with a finishing machine. The finishing should be started with full disk. In areas where the power smoothing is not possible, the surface should be hand finished. It is important that power finishing must be stopped before the surface would start to burn.

consumption and installation process can be influenced by additional circumstances of the application process as well. The contractor responsible for the application should verify our prepositions by a preliminary test and ensure that the conditions of the installation are ideal. We do not take any responsibility for any damage caused by defective installation. For security measures, please ask us for the product safety data sheet.